






B90L



底座安装孔、T形槽部 详图



SE:行程终端
ME:机械终端

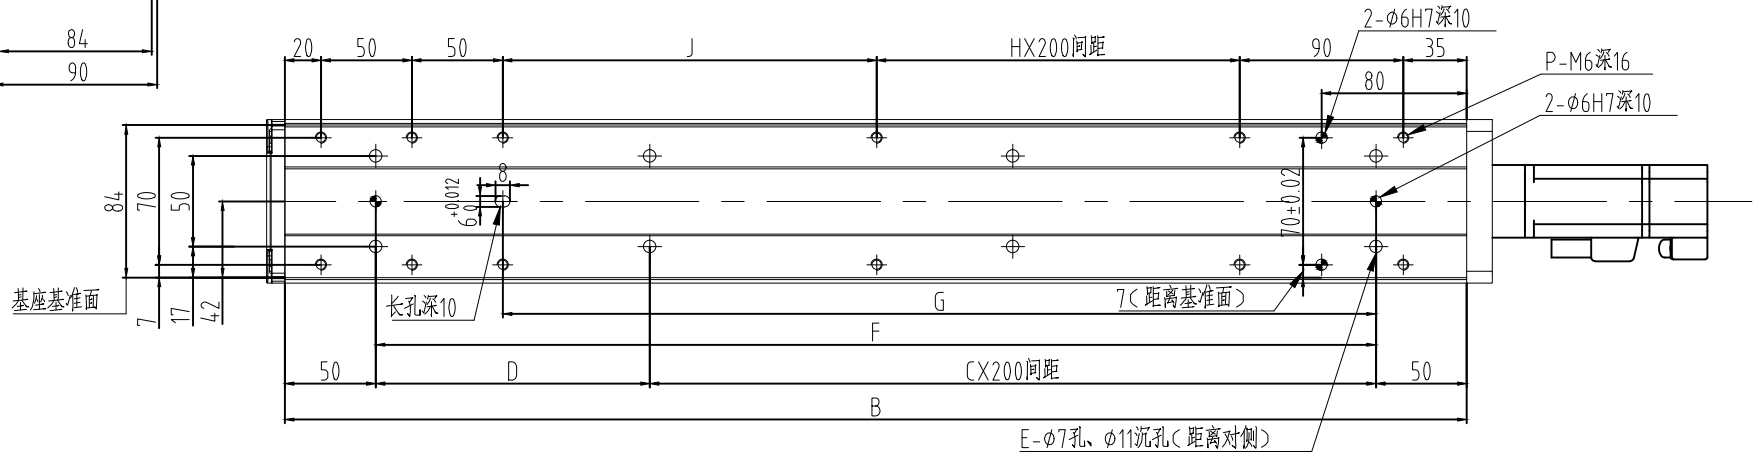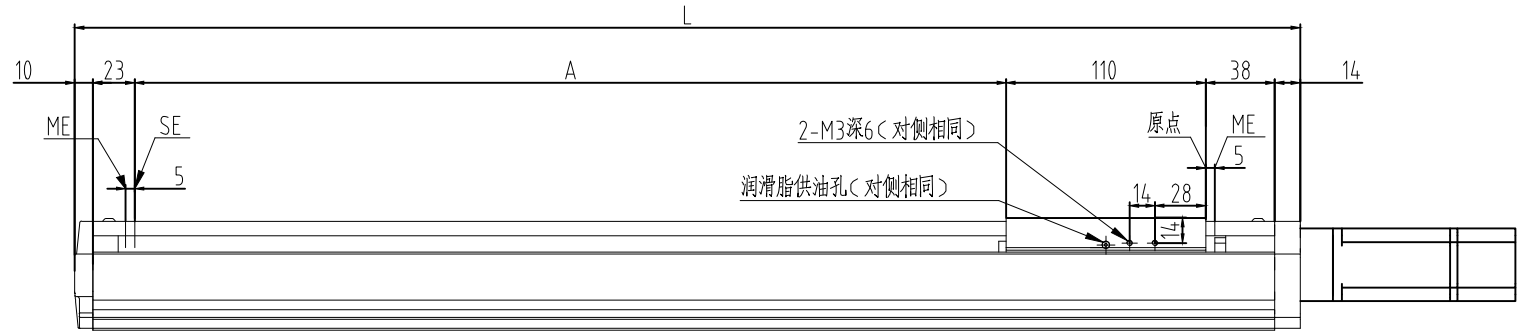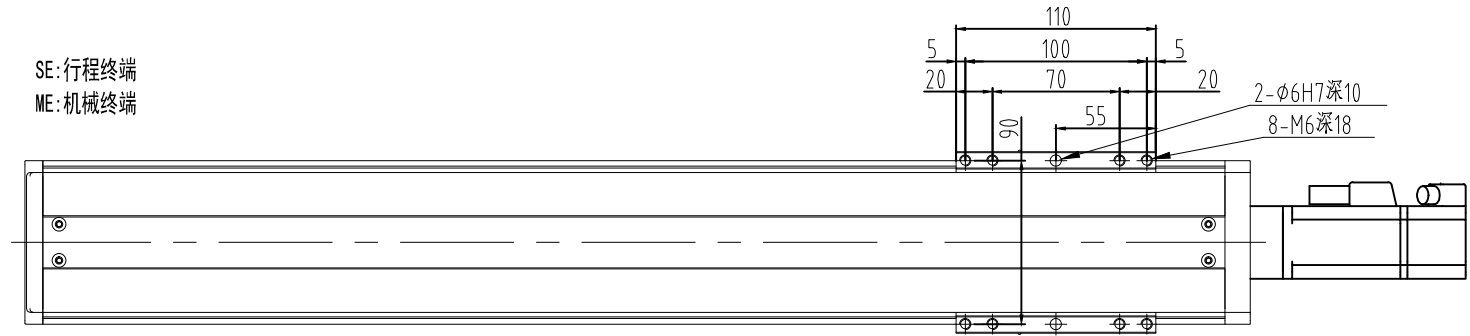

■各行程尺寸・质量

※带刹车时质量增加0.3kg

行程S	130	180	230	280	330	380	430	480	530	580	630	680	730	780	830	880	930	980	1030	1080
L	343	393	443	493	543	593	643	693	743	793	843	893	943	993	1043	1093	1143	1193	1243	1293
A	130	180	230	280	330	380	430	480	530	580	630	680	730	780	830	880	930	980	1030	1080
B	301	351	401	451	501	551	601	651	701	751	801	851	901	951	1001	1051	1101	1151	1201	1251
C	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5
D	201	251	101	151	201	251	101	151	201	251	101	151	201	251	101	151	201	251	101	151
E	4	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14
F	201	251	301	351	401	451	501	551	601	651	701	751	801	851	901	951	1001	1051	1101	1151
G	131	181	231	281	331	381	431	481	531	581	631	681	731	781	831	881	931	981	1031	1081
H	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4
J	56	106	156	206	256	106	156	206	256	106	156	206	256	106	156	206	256	106	156	206
P	10	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18
质量 (kg)	4.2	4.5	4.9	5.2	5.5	5.8	6.2	6.5	6.8	7.1	7.5	7.8	8.1	8.4	8.8	9.1	9.4	9.7	10.1	10.4